

B6.33 WARNING SIGN PLACEMENT

Location of signs is as follows and/or as shown on Sale Area Map or other attached drawings.

Warning Sign Placement Table

<u>Sign Number</u>	<u>Location</u>
FW 11-9-30	The intersection of FR 7735 and State Highway 149

WARNING SIGN SPECIFICATIONS FOR LOGGING AND ROAD CONSTRUCTION AND MAINTENANCE OPERATIONS

The following is a guide for meeting the intent of B6.33 SAFETY. This is not a complete list of signs that may be needed. All signs are to be manufactured and installed as specified in MUTCD. In event of conflict, MUTCD standards shall take precedence over the following:

Size: Standard 30", minimum 24", or as shown.

Shape: As Shown.

Background: Shall be fully retro-reflective.
Temporary signs shall have an orange background.
Permanently installed signs shall have a yellow background.

Lettering: Minimum 4" letters, standard alphabet, black, Series "C". Border: ½ inch, black.

Mounting: Signs shall be mounted so as to be clearly visible to road user. Signs shall not be mounted on trees or other sign posts.

Sign Numbers: Sign numbers are from MUTCD. An "F" before the number indicates a Forest Service sign. An "R" or "L" after the number indicates right or left.

LOGGING OPERATION SIGNS




FG20-3-48"

FG20-3-XX*



FW20-1-30"

FW20-1-XX



W-5-24"
W-5-30"

W-5-XX




FW11-9-24"
FW-9-30"

FW11-9-XX



FW-1-24"
FW-1-30"

FW-1-XX



FG20-3a-48"

FG20-3a-XX




FW11-7-24"

FW11-7-XX



FW11-9a-24"

FW-9a-XX



W6-6-24"

W6-6-XX



FW11-3-24"

FW11-3-XX

* XX = size of the sign in inches

ROAD CONSTRUCTION AND MAINTENANCE SIGNS



FG20-1-48"



W21-1a
Always Orange





W21-3-30"
Always Orange




FG20-2-48"

TYPICAL TYPE 3 MOVEABLE BARRICADE

Color: Orange & White. (See MUTCD for length and stripe size.)

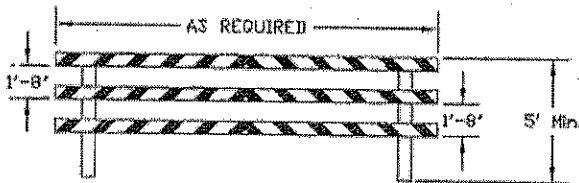

SIGN INSTALLATION ILLUSTRATION

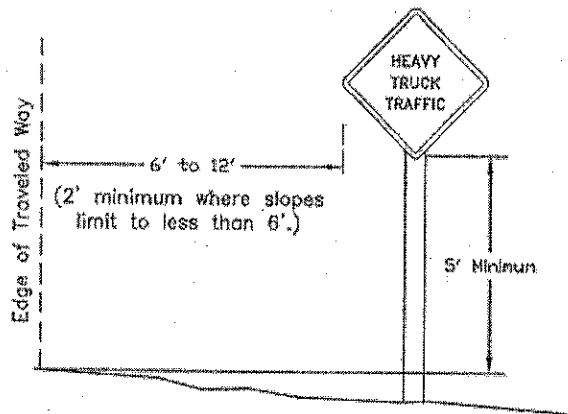

C2.301# - CUTTING UNIT BOUNDARIES (09/2001)

The boundaries of cutting units are designated as shown in the following table. The trees used for boundary designation are not to be cut.

See Cutting Unit Boundary Designation Table

C2.301# -- CUTTING UNIT BOUNDARIES (09/2001)Cutting Unit Boundary Designation Table

<u>Cutting Unit</u>	<u>Paint Color</u>	<u>Designation</u>
ALL	Orange	Vertical stripes of orange tracer paint on three sides of each cutting unit boundary tree, approximately three feet long and two feet wide. The middle stripe faces into the cutting unit. Corner trees are designated with three horizontal bands around the tree near DBH, which are approximately two inches wide. Every boundary tree has a stump mark painted on the downhill side of the tree.

C2.356# - INDIVIDUAL TREES (LEAVE TREE MARKING) (09/2001)

Notwithstanding B2.35, all live, dead and windthrown trees meeting utilization standards in A2, in units shown as LTM on the Sale Area Map, are designated for cutting. Trees to be left uncut are marked above and below stump height as shown in the table below.

See Leave Tree Marking Table

C2.356# -- INDIVIDUAL TREES (LEAVE TREE MARKING) (09/2001)

Leave Tree Marking Table

Cutting Unit	Paint Color
ALL	Orange

C4.211 - DOWNPAYMENT (06/2007)

The downpayment amount shown in A18 may not be applied toward any other payment required under the provisions of this contract, except damages determined pursuant to B9.4, transferred to other timber sales, or refunded until (a) stumpage value representing 25 percent of the total bid value of the timber sale has been charged and paid for, or (b) the estimated value of the unscaled timber is equal to or less than the amount of the downpayment, or (c) if 36 CFR 223.49(e) is applicable, the estimated value of the unscaled timber is equal to or less than the amount of the downpayment.

If Forest Service makes a determination that this contract should not have been included under increased downpayment requirements (36 CFR 223.49(e)), the downpayment shall be revised and applied in accordance with 36 CFR 223.49(f).

C4.212 - TEMPORARY REDUCTION OF DOWNPAYMENT (08/2009)

Notwithstanding B4.211 or C4.211, upon the Purchaser's written request Forest Service may temporarily reduce the downpayment when Purchaser's scheduled operations are delayed or interrupted for 30 or more consecutive days, or the contract term is extended for 30 or more consecutive days for any of the following reasons:

- (1) Forest Service requests or orders Purchaser to delay or interrupt operations for reasons other than breach;
- (2) Purchaser interrupts or delays scheduled operations to work on a sale designated by the Forest Service as in urgent need of harvesting; or
- (3) An adjustment of the contract term authorized upon a determination of substantial overriding public interest, including a market-related contract term addition, or an urgent removal contract term extension under 36 CFR 223.53.

When Purchaser is not cutting or removing timber under contract during a qualifying period of delay, interruption, or extension listed above the downpayment may be reduced to \$1000 or 2 percent of the downpayment amount stated in the contract, whichever is greater. The Purchaser must restore the downpayment to the full amount stated in the contract within 15 days from receipt of the bill for collection and written notice from the Contracting Officer that the basis for temporarily reducing the downpayment no longer exists. Purchaser shall not cut or remove timber on a contract where the downpayment has been temporarily reduced until the downpayment amount stated in the contract is fully restored.

C4.31# - BLANKET BOND (09/2001)

If Purchaser furnishes an acceptable bond or deposits securities, in accordance with B4.3, to guarantee payment for timber from this and other timber sales within the same Contracting Zone, the amount of such bond or deposited securities shall be allocated to such sales by Forest Service. When there is to be no timber cutting hereunder for 30 calendar days or more and payment of current charges has been made, the allocation to this sale shall be reallocated to other sales at Purchaser's request, and Purchaser shall not start cutting hereunder until this sale receives an allocation which will, in combination with transferred-in Purchaser Credit, meet the obligation for payment guarantee.

A Contracting Zone as stated in this provision contains the following National Forests:

Contracting Zone	National Forests
SZ	GrandMesa/Uncompahgre/Gunnison National Forest
SZ	Rio Grande National Forest
SZ	Pike-San Isabel National Forest
SZ	San Juan National Forest

C4.4 - PAYMENTS NOT RECEIVED (08/2012)

(a) Payments are due and payable on the date of issue indicated on the bill for collection. When a payment for timber cut and other charges is not received at the location designated by Forest Service by the date specified in the bill for collection for, Contracting Officer will suspend all or any part of Purchaser's Operations until payment or acceptable payment guarantee is received. Other charges include, but are not limited to:

- (i) Slash disposal, road maintenance, and contract Scaling deposits;
- (ii) Cooperative work at rates established by specific agreement under B4.218;
- (iii) Damages pursuant to B9.4;
- (iv) Road use fees;
- (v) Restoration of downpayment pursuant to B4.22;
- (vi) Periodic payments pursuant to B4.213;
- (vii) Extension Deposits pursuant to B4.217; and
- (viii) Other mandatory deposits.

(b) Failure to pay amounts due by the date specified in the bill for collection shall be considered a breach under B9.3. The 30-day notice period prescribed therein shall begin to run as of the end of business on the date specified for receipt of payments. If the performance or payment is guaranteed by surety bond, the surety will receive a copy of the written notification of breach. Demand will be made on the surety or other institution providing the guarantee or bond instrument for immediate payment 10 days after issuance of written notification of the breach.

(c) Pursuant to the Debt Collection Improvement Act of 1996, as amended, if payment is not received by Forest Service within 15 days after the date of issue indicated on the bill for collection:

(i) Simple interest shall be assessed at the Current Value of Funds Rate as established by the Secretary of the Treasury. Interest will begin to accrue as of the date of issue indicated on the initial bill for collection.

(ii) Debtors will be assessed administrative charges, in addition to the delinquent amount due. Administrative charges are those additional costs incurred by the Government in processing, handling, and collecting delinquent debts.

(iii) A penalty charge of six (6) percent per annum will be assessed on any portion of a debt delinquent more than 90 days. This penalty charge is in addition to interest and administrative charges under paragraphs (c)(i) and (c)(ii). The penalty charge shall accrue from the date of issue indicated on the bill for collection and shall be assessed on all outstanding amounts, including interest and administrative costs assessed under paragraphs (c)(i) and (c)(ii).

(iv) Payments will be credited on the date received by the Federal Depository or Collection Officer designated on the bill for collection.

(d) Forest Service remedies for Purchaser's failure to make payment for timber cut and other charges when due, except for accrual of interest, suspension of all or any part of Purchaser's Operations, and administrative offset, shall be stayed for so long as:

- (i) A bona fide dispute exists as to Purchaser's obligation to make such payment and
- (ii) Purchaser files and prosecutes a timely Claim.

Sale Name: Rambo Salvage

C5.12# - USE OF ROADS BY PURCHASER (06/1999)

Purchaser's use of existing roads identified on Sale Area Map by the following codes is prohibited or subject to restrictive limitations, unless agreed otherwise:

Code	Use Limitations
X	Hauling prohibited
R	Hauling restricted
U	Unsuitable for hauling prior to completion of agreed reconstruction
P	Use prohibited
A	Public use restriction
W	Regulation waiver

Roads coded A will be signed by the Forest Service to inform the public of use restrictions. Purchaser's use of roads coded R, A, or W shall be in accordance with the following restrictions:

See Restricted Road List Table.

C5.12# -- USE OF ROADS BY PURCHASER (06/1999)Restricted Road List Table

Road Number	Road Name	Termini		Map Legend	Description of Restrictions
		From MP	To MP		
7735	RAMBOUILLET	Entire Length of Road		R	Snow plowing is prohibited from December 15th to May 1st, inclusive, unless an acceptable plan to avoid conflicts between recreationists and logging operations is established and accepted by the Gunnison District Ranger.
7735	RAMBOUILLET	Entire Length of Road		U	This road is unsuitable for hauling prior to completion of agreed reconstruction
7735.1A	E FORK RAMBOUILLET	Entire Length of Road		P	Use Prohibited
7547	LA GARITA STOCK DRIVEWAY				

C5.124 - EXISTING ROADS (11/1998)

Notwithstanding B5.12, existing roads not shown on Sale Area Map may be used upon written agreement of use restrictions and closure requirements following completion of use.

C5.13# - ROAD COMPLETION DATE (04/2004)

Construction of Specified Roads shall be completed no later than 07/31/2015; except for earlier construction completion dates for roads listed below:

Road Number	Road Name	Station		Completion Date
		From	To	

N/A

Completion date is binding on the party that constructs road, whether Purchaser or Forest Service. Contracting Officer shall modify the completion date in writing to conform to the approved Plan of Operations under B6.311 at the request of Purchaser.

When Purchaser elects Forest Service construction of Specified Roads shown in sale advertisement, Forest Service may adjust construction completion date when road construction is delayed or interrupted for causes that qualify for an adjustment of the completion date of Forest Service's road construction contract. When qualifying delays or interruptions of road construction occur, Forest Service shall evaluate such occurrences and document any findings. The current status of any adjustment shall be available to Purchaser on request. Promptly after the end of Normal Operating Season in which qualifying days occur, Forest Service shall give Purchaser written notice of (a) number of qualifying days claimed, and (b) new construction completion dates. After all road construction is complete, Forest Service shall grant Contract Term Adjustment. Such adjustment shall be limited to road completion date delays that occurred during Normal Operating Season.

If Forest Service is responsible for road construction and the actual date of road completion is 1 year or more after the completion date stated above, Purchaser may request a rate redetermination under B3.3 for remaining volume. Such request must be made within 30 days of notification that road construction has been completed. Upon receipt of such request, Forest Service shall redetermine rates using standard methods in effect on the completion date of road construction. Rates to be established shall apply to all timber removed from Sale Area after the effective date of the rate redetermination.

Forest Service shall in no way be responsible for any delay or damage caused by road contractor in performing the road construction, except such delay as may be the fault or negligence of Forest Service.

When Purchaser constructs Specified Roads and requests Contract Term Adjustment, completion dates shall be adjusted by number of days that qualify for such adjustment, provided such qualifying days occur before specified construction completion date. When Purchaser desires to construct an alternate facility under B5.26, Forest Service and Purchaser shall agree, in writing, on a construction completion date for alternate facility. Contract Term Adjustment as noted above will apply. Completion date shall be adjusted where a Design Change or physical changes necessitate a modification of Specified Road construction work that increases the scope or magnitude of the required work.

If Purchaser fails to complete construction of any or all Specified Roads by applicable completion date, as adjusted, Contract Term Extension shall not be granted.

As used in this Subsection, construction of a road is completed when:

(a) Purchaser constructs Specified Roads and Forest Service furnishes Purchaser with written notice of acceptance under B5.36 or

(b) Forest Service constructs road and furnishes Purchaser with written notice authorizing use of road.

Notwithstanding B5.1, Purchaser shall not use a road that Purchaser has elected for Forest Service to construct, until construction is completed and Forest Service furnishes Purchaser with written notice authorizing use of road.

C5.213# - DEPOSIT FOR RECONSTRUCTION ENGINEERING SERVICES (04/2004)

Purchaser shall make a cash deposit for engineering services (preconstruction and construction) provided by Forest Service for reconstruction of National Forest system roads necessary to accommodate Purchaser's use under this contract, pursuant to 16 USC 537.

The total amount to be deposited by Purchaser for reconstruction related engineering services to be completed by Forest Service personnel or by public works contract is \$ \$10,462.00. Purchaser shall make this deposit at the end of the first full Normal Operating Season or 12 months from contract award, whichever occurs first. In the event a different deposit schedule is agreed to, such deposit shall be due within 15 days after the date of issue indicated on the initial bill for collection, pursuant to B4.4.

The amount of the required deposit will be shown as an associated charge on Purchaser's Timber Sale Account. Forest Service shall retain any unexpended deposit for reconstruction related engineering services.

The deposit for reconstruction related engineering services shall be commensurate with project need and Purchaser's road use. Forest Service shall complete reconstruction related engineering services on the following schedule unless a different completion schedule is agreed in writing:

Road or Facility No.	Termini		Engineering Services Completion Date
	From	To	
N/A			

Reconstruction related engineering services may consist of some or all of the engineering work and expense of: preparing, setting out, controlling, inspecting, and measuring the reconstruction of a National Forest system road.

Sale Name: Rambo Salvage

C5.31# - ROAD MAINTENANCE REQUIREMENTS (07/2001)

Purchaser shall maintain roads in accordance with the following Contract Road Maintenance Requirements Summary:

See Contract Road Maintenance Requirements Summary Table.

C5.31# -- ROAD MAINTENANCE REQUIREMENTS (07/2001)**Contract Road Maintenance Requirements Summary Table**

Road	Termini		Miles	Applicable Prehaul Road Maintenance Specifications						
	From MP	To MP		T800	T802	T803	T804	T805	T808	T809
n/a	0	0	0.00							

P = Purchaser Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road	Termini		Miles	Applicable During Haul Road Maintenance Specifications						
	From MP	To MP		T800	T802	T803	T804	T805	T808	T809
7735	0	4.42	4.42	P	P	P	P	P	P	P

P = Purchaser Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road	Termini		Miles	Applicable Post Haul Road Maintenance Specifications						
	From MP	To MP		T800	T802	T803	T804	T805	T808	T809
7735	0	4.42	4.42	P	P	P	P	P	P	P

P = Purchaser Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road Maintenance T-Specifications**for****Timber Sale Contracts**

To be used with Timber Sale Contract Form 2400-6T, CT5.31#

No.	Specification Title
T-800	Definitions
T-802	Ditch Cleaning
T-803	Surface Blading
T-804	Surfacing Repair
T-805	Drainage Structures
T-808	Miscellaneous Structures
T-809	Waterbars

SPECIFICATION T-800 DEFINITIONS

Wherever the following terms or pronouns are used in Specifications T-801 through T-811, the intent and meaning shall be interpreted as follows:

800-1.1 - Agreement. Maintenance projects require a mutually acceptable method to resolve the problems which arise when incompatible situations arise between drawings and specifications and actual conditions on the ground to allow orderly and satisfactory progress of the maintenance.

These specifications have been developed in anticipation of those problem areas and have provided that such changes will be by Agreement.

It is intended that drawings and specifications will govern unless "on-the-ground" conditions warrant otherwise, when specifications call for "Agreement", "agreed", or "approval" such Agreement or approval shall be promptly confirmed in writing.

800-1.2 - Annual Road Maintenance Plan. A plan prepared by various users of one or several roads. The plan is an Agreement on maintenance responsibilities to be performed for the coming year.

800-1.3 - Base Course. Material used to reinforce Subgrade or, as shown on drawings, placed on Subgrade to distribute wheel loads.

800-1.4 - Berm. Curb or dike constructed to prevent Roadway runoff water from discharging onto embankment slope.

800-1.5 - Borrow. Select Material taken from designated borrow sites.

800-1.6 - Crown, Inslope, and Outslope. The cross slope of the Traveled Way to aid in drainage and traffic maneuverability.

800-1.7 - Culverts. A conduit or passageway under a road, trail, or other obstruction. A culvert differs from a bridge in that it is usually entirely below the elevation of the Traveled Way.

800-1.8 - Drainage Dip. A dip in the Traveled Way which intercepts surface runoff and diverts the water off the Traveled Way. A Drainage Dip does not block the movement of traffic.

T-800-1

800-1.9 - Drainage Structures. Manufactured structures which control the runoff of water from the Roadway including Inslope, overside drains, aprons, flumes, downdrains, downpipes, and the like.

800-1.10 - Dust Abatement Plan. A table which lists the road, dust palliative, application rates, and estimated number of subsequent applications.

800-1.11 - Lead-off Ditches. A ditch used to transmit water from a Drainage Structure or Drainage Dip outlet to the natural drainage area.

800-1.12 - Material. Any substances specified for use in the performance of the work.

800-1.13 - Prehaul Maintenance. Road maintenance work which must be accomplished to maintain the roads to a satisfactory condition commensurate with the Purchaser's use, provided Purchaser's Operations do not damage improvements under BT6.22 or National Forest resources and hauling can be done safely. This work will be shown in the Annual Road Maintenance Plan as provided in CT5.31#.

Prehaul Maintenance work the Purchaser elects to perform will be in compliance with the Road Maintenance T-Specifications.

800-1.14 - Roadbed. The portion of a road between the intersection of Subgrade and sideslopes, excluding that portion of the ditch below Subgrade.

800-1.15 - Road Maintenance Plan. A table which shows applicable road maintenance specifications to be performed by Purchaser on specific roads.

800-1.16 - Roadside. A general term denoting the area adjoining the outer edge of the Roadway.

800-1.17 - Roadway. The portion of a road within the limits of excavation and embankment.

800-1.18 - Shoulder. That portion of Roadway contiguous with Traveled Way for accommodation of stopped vehicles, for emergency use, and lateral support of base and Surface Course, if any.

800-1.19 - Slide. A concentrated deposit of Materials from above or on backslope extending onto the Traveled Way or Shoulders, whether caused by mass land movements or accumulated ravelling.

800-1.20 - Slough. Material eroded from the backslope which partially or completely blocks the ditch, but does not encroach on the Traveled Way so as to block passage of traffic.

800-1.21 - Slump. A localized portion of the Roadbed which has slipped or otherwise become lower than that of the adjacent Roadbed and constitutes a hazard to traffic.

800-1.22 - Special Project Specifications. Specifications which detail conditions and requirements peculiar to the individual project.

800-1.23 - Subgrade. Top surface of Roadbed upon which Base Course or Surface Course is constructed. For roads without Base Course or Surface Course, that portion of Roadbed prepared as the finished wearing surface.

800-1.24 - Surface Course. The Material placed on Base Course or Subgrade primarily to resist abrasion and the effects of climate. Surface Course may be referred to as surfacing.

800-1.25 - Surface Treatment Plan. A table which lists the roads and surface treatments to be applied.

800-1.26 - Traveled Way. That portion of Roadway, excluding Shoulders, used for the movement of vehicles.

800-1.27 - Turnouts. That portion of the Traveled Way constructed as additional width on single lane roads to allow for safe passing of vehicles.

800-1.28 - Water Source. A place designated on the Road Maintenance Map for acquiring water for road maintenance purposes.

800-1.29 - Waterbar. A dip in the Roadbed which intercepts surface runoff and diverts the water off the Roadway. A Waterbar is not designed to be traversable by logging trucks.

SPECIFICATION T-802 DITCH CLEANING

DESCRIPTION

1.1 Ditch cleaning is removing and disposing of all Slough Material from Roadway ditches to provide a free-draining waterway.

REQUIREMENTS

3.1 Ditch cleaning shall be repeated during the year as often as necessary to facilitate proper drainage.

3.2 All Slough Material or other debris which might obstruct water flow in the Roadway ditch shall be removed. Material removed from the ditch, if suitable, may be blended into existing native road surface or Shoulder or placed in designated Berms in conjunction with Surface Blading T-803 operations.

Material removed from ditches that is not by Agreement blended into existing roads or placed in Berms shall be loaded and hauled to the disposal site designated by the Forest Service.

3.3 Roadway backslope or Berm shall not be undercut.

SPECIFICATION T-803 SURFACE BLADING

DESCRIPTION

1.1 Surface blading is keeping a native or aggregate Roadbed in a condition to facilitate traffic and provide proper drainage. It includes maintaining the Crown, Inslope or Outslope of the Traveled Way, Turnouts, and Shoulder; repairing Berms; blending approach road intersections; and cleaning bridge decks, Drainage Dips, and Lead-off Ditches.

REQUIREMENTS

3.1 Surface blading shall be performed before, during, and after Purchaser's use as often as necessary to facilitate traffic and proper drainage.

3.2 The surface blading shall preserve the existing cross-section. Surface irregularities shall be eliminated and the surface left in a free-draining state and to a smoothness needed to facilitate traffic. Surface Material which has been displaced to the Shoulders or Turnouts shall be returned to the Traveled Way. The blading operation shall be conducted to prevent the loss of surface Material and to provide for a thorough mixing of the Material being worked.

3.3 Water, taken from Water Sources designated on Sale Area Map, shall be applied during blading if sufficient moisture is not present to cut, mix, or compact the surface Material.

3.4 On native surfaced roads, Material generated from backslope Sloughing, and ditch cleaning may be blended with the surface Material being worked. On aggregate surfaced roads this Material shall not be blended with Surface or Base Course Material unless agreed otherwise.

3.5 Roadway backslopes or Berms shall not be undercut, nor shall new Berms be established unless agreed otherwise.

Berms shall be repaired by placing Material, as needed to restore the Berm, to reasonably blend with existing line, grade, and cross-section.

3.6 Drainage Dips and Lead-off Ditches shall be cleaned and maintained to reasonably blend with existing line, grade, and cross-section.

T-803-1

3.7 Intersecting roads shall be bladed for a distance of 50 feet to assure proper blending of the two riding surfaces.

3.8 Rocks or other Material remaining on the Traveled Way after the final pass that are larger than 4 inches in diameter or are larger than the maximum size of imported surfacing shall be removed from the Traveled Way. Unless otherwise designated by the Forest Service, the oversized Material shall be disposed of by sidecasting. Sidecasting into streams, lakes, or water courses will not be permitted.

3.9 Material resulting from work under this specification shall not remain on or in structures, such as Culverts, overside drains, cattleguards, ditches, Drainage Dips, and the like.

3.10 Material resulting from work under this specification, plus any accumulated debris, shall be removed from bridge decks and the deck drains opened.

T-803-2

SPECIFICATION T-804 SURFACING REPAIR

DESCRIPTION

1.1 Surfacing repair is repairing potholes or small soft areas in the Traveled Way. It includes area preparation and furnishing and placing all necessary Materials, and other work necessary to repair the surface.

MATERIALS

2.1 Material used in the repair of soft areas on aggregate or native surfaced roads may be acquired from approved commercial sources, designated Forest Service Borrow areas, or Borrow sources agreed to. The quality and quantity of the imported Material used in the repair will be limited to that needed to provide a stable Traveled Way for hauling and to minimize damage to the road and adjacent resources. The quantity of imported surface repair Material used in the appraisal estimate will be shown on Road Maintenance Plan. However, the magnitude of the work may vary depending on Purchaser's hauling schedule and ground conditions.

2.2 Material used in the repair of bituminous pavements may be acquired from local commercial sources. If a mixing table is required, the location shall be approved by the Forest Service. The bituminous mixture to be used by the Purchaser shall be approved by the Forest Service. The Purchaser's share of the quantity of bituminous mixture used in the appraisal estimate will be shown on Road Maintenance Plan. However, Purchaser's share of the work may vary depending on Purchaser's hauling schedule, ground conditions, other traffic, etc.

REQUIREMENTS

3.1 Work under this specification shall be performed in a timely manner to reduce further deterioration of the Traveled Way.

3.2 Soft spots on aggregate or native surfaces shall be repaired by placing the imported Surface Course on top of the soft spot. Layers of imported Material shall be placed until a firm surface is produced.

3.3 Bituminous Pavement Repairs. The areas to receive bituminous pavement repairs will be marked on the road surface by the Forest Service just prior to Purchaser performing the work.

T-804-1

3.4 Potholes (deep patch). Surface Course and Base Course Materials shall be excavated to a depth necessary to reach firm, suitable Material. The minimum depth of excavation shall be 2 inches and the maximum depth of excavation shall be to the top of the Subgrade.

The edges of the prepared hole shall be extended to form a vertical face in unfractured asphalt surfacing. The prepared hole shall generally be circular or rectangular in shape, dry, and cleaned of all loose Material.

Prepared potholes shall be patched or barricaded immediately.

The faces of the prepared hole shall be tacked with a slow-setting emulsified asphalt.

The bituminous mixture shall be placed in layers not exceeding a compacted depth of 2 inches. Each layer shall be compacted thoroughly with hand or mechanical tampers or rollers. Compaction shall not be done with equipment wheels.

Upon completion, the compacted patch in the pothole shall be flush, with a tolerance or approximately $\frac{1}{4}$ inch to $\frac{1}{2}$ inch above the level of the adjacent pavement.

3.5 Skin Patches. Bituminous mixture shall be distributed uniformly with feathered edges in layers not to exceed 2 inches compacted depth. When multiple layers are ordered, joints shall be offset at least 6 inches between layers.

Each layer shall be compacted by two passes with a 7-10 ton steel roller or comparable vibratory roller.

3.6 Asphalt Berm. Damaged segments of Berm shall be removed and the exposed ends beveled at approximately 45 degrees from vertical. The Berm foundation shall be cleaned and patched as necessary. The foundation and joining surfaces shall be coated with a slow-setting emulsified asphalt. Asphalt mix shall be placed and compacted to conform with the shape and alignment of the undamaged segment.

3.7 Disposal. All Materials removed from potholes, patches, and Berms shall be disposed of at disposal sites designated by the Forest Service.

SPECIFICATION T-805 DRAINAGE STRUCTURES

DESCRIPTION

1.1 This work consists of maintaining Drainage Structures and related items such as inlet and outlet channels, existing riprap, trash racks, and dropinlets.

MATERIALS

2.1 All Materials used in the maintenance of Drainage Structures shall conform by type and specification to the Material in the structure being maintained.

REQUIREMENTS

3.1 Drainage Structures and related items shall be cleared of all foreign Material which has been deposited above the bottom of the structure and all vegetative growth which interferes with the flow pattern. Material removed that cannot be incorporated into maintenance work shall be hauled to a disposal site designated by the Forest Service.

3.2 If outlet or inlet riprap was installed by Purchaser as a construction item or existed prior to Purchaser's haul, it shall be maintained in good condition including the replacement of riprap if necessary to previous line, grade, and cross-section.

3.3 Perform maintenance to insure the proper functioning of the head walls, aprons, inlet assemblies, overside drains, riprap, trash racks, and other facilities related to the Drainage Structure.

SPECIFICATION T-808 MISCELLANEOUS STRUCTURES

DESCRIPTION

1.1 Maintenance of miscellaneous structures includes cattleguards, gates, and other similar structures that have been previously installed to insure safe and efficient operation of the road.

MATERIALS

2.1 Any Materials needed in the maintenance of miscellaneous structures shall be similar in type and quality to the Material in the structure being maintained.

REQUIREMENTS

3.1 Cattleguards. Loose rails shall be welded or bolted back in place.

Excess Material carried into the cattleguard shall be removed when drainage is blocked or when it reaches 6 inches from the bottom of the cattleguard frame. Drainage into and from the cattleguard shall be kept open.

3.2 Gates. Gates shall be kept in good repair and made to swing easily. Hinges or latches shall be repaired if not operating properly.

Brush and debris shall be removed from within the swinging radius.

SPECIFICATION T-809 WATERBARS

DESCRIPTION

1.1 This work consists of installing or removing Waterbars in the Roadbed.

REQUIREMENTS

3.1 Waterbars shall be installed on roads shown on Road Maintenance Plan in accordance with the attached drawings and at locations designated or staked on the ground.

All Material excavated shall be used in the installation of the Waterbar. Bermed Material shall be compacted by operating heavy equipment over the length and width of the Berm.

3.2 Waterbars shall be removed on roads shown on Road Maintenance Plan by blading the Berm into the adjacent depression to form a smooth transition along the Traveled Way. The length and width of the fill Material shall be compacted by the equipment performing the work.

3.3 Waterbars may be required to be installed between seasons of use and then removed when haul is resumed. Waterbar installation may also be required when use of a road has been completed.

T-809-1

Sale Name: Rambo Salvage

C5.35# - CLOSURE OF TEMPORARY ROADS (09/2001)

Unless otherwise agreed to in writing, temporary roads associated with the cutting unit(s) listed in the following table shall be closed using the closure method described.

See Temporary Road Closure Table

C5.35# -- CLOSURE OF TEMPORARY ROADS

Temporary Road Closure Table

<u>Cutting Unit(s)</u>	<u>Type of Facility</u>	<u>Closure Method</u>
ALL	Temporary Roads	In addition to the requirements set forth in B6.63, block the road to normal traffic by restoring the roadbed to original contour and scattering boulders or other barriers at the beginning of the road for an effective distance. Remove temporary stream crossings (including fill material in the active channel), road ditches, and ditch-relief culverts. Restore channel geometry and original shape. Establish ground cover on disturbed sites by seeding with native plants, as per provision C6.601, and scattering slash, stumps, or cull logs on the road surface the entire length of the road. De-compact 80% or more of the road bed to a depth of 8-12 inches. Restore cuts and fills to the original slope contours along road segments with ≥ 4 foot vertical cut slopes and as opportunities arise.

C5.36# - SNOW REMOVAL (09/2001)

Snow removal shall be done in a manner to preserve and protect the roads to insure safe and efficient transportation and to prevent unacceptable erosion damage to roads, streams, and adjacent lands.

A. Description. Snow removal work by Purchaser shall include:

1. Removal of snow from entire road surface width including turnouts.
2. Removal of snow slides, minor earth slides, fallen timber and boulders that obstruct normal road surface width including turnouts.
3. Maintain drainage so that the drainage system will function efficiently.

B. Performance. All items of snow removal shall be done currently as necessary to insure safe, efficient transportation. Work shall be done in accordance with the following minimum standards of performance.

1. Removal of material. All debris, except snow and ice, that is removed from the road surface and ditches shall be deposited away from stream channels at agreed locations.
2. During snow removal operations, banks shall not be undercut nor shall gravel or other selected surfacing material be bladed off the roadway surface.
3. Ditches and culverts shall be kept functional during and following roadway use.
4. Snow berms shall not be left on the road surface. Berms left on the shoulder of road shall be removed and/or drainage holes shall be opened and maintained. Drainage holes shall be spaced as required to obtain satisfactory surface drainage without discharge on erodible fills.
5. Dozers and skidders shall not be used to plow snow on system roads without written approval of Forest Service. Upon approval, dozers and skidders must be equipped with shoes or runners to keep the plow blade a minimum of 4 inches above the road surface unless specifically removed from the requirements in writing.
6. Snow must not be removed to the road surface. A minimum 4 inch depth must be left to protect the roadway.
7. Purchaser's damage from, or as a result of, snow removal shall be restored in a timely manner.

C6.411# - FELLING AND BUCKING (SPECIAL OBJECTIVES) (11/1998)

Unless otherwise agreed in writing, silvicultural prescriptions and land management objectives shall be conducted and accomplished by the following requirements, methods and procedures:

See Felling and Bucking Table

C6.411# -- FELLING AND BUCKING (SPECIAL OBJECTIVES) (11/1998)Felling and Bucking Table

Cutting Unit	Special Objective
ALL	To restrict residual tree damage, harvest trees shall be felled, insofar as reproduction, topography, safety, and lean will permit, to angle into tractor roads and/or skid trails.
	Whenever feasible, trees shall not be felled into or across streamcourses.
	Heavy equipment shall not operate in wet areas where excessive soil rutting or compaction can occur, or when soil moisture is above the plastic limit (a rolled thread of soil 1/8 inch in diameter crumbles or cracks when soil moisture is below the plastic limit). Equipment may operate in wet areas if the soil is protected by at least 1-foot of packed snow or 2 inches of frozen soil, unless determined otherwise by the Timber Sale Administrator. Trees may require hand falling and winching to skid trails especially in units with a high occurrence of wet areas.
	Felling and equipment operations shall be conducted in a manner that avoids damage to all conifer and aspen regeneration and other live trees to the maximum extent possible.

Sale Name: Rambo Salvage

C6.42# - SKIDDING AND YARDING (SPECIAL OBJECTIVES) (11/1998)

Unless otherwise agreed in writing, silvicultural prescriptions and land management objectives shall be conducted and accomplished by the following requirements, methods and procedures

See Skidding and Yarding Table

C6.42# -- SKIDDING AND YARDING (SPECIAL OBJECTIVES) (11/1998)Skidding and Yarding Table

Cutting Unit	Special Objective
ALL	Windfall down material across skid trails shall be bucked prior to being pushed by tractors.
	Insofar as topography and ground conditions permit, products shall be pulled endwise from the bed where they are felled.
	Skidding or yarding of logs no longer than 41 feet shall be required in order to avoid damage to the residual stand.
	Skidding equipment shall not operate in wet areas where excessive soil rutting or compaction can occur, or when soil moisture is above the plastic limit (a rolled thread of soil 1/8 inch in diameter crumbles or cracks when soil moisture is below the plastic limit). Equipment may operate in wet areas if the soil is protected by at least 1 foot of packed snow or 2 inches of frozen soil. Trees and/or logs may require cable winching to skid trails especially in units with a high occurrence of wet areas.
	Heavy equipment shall not operate in ephemeral streams or swales except to cross at designated points, build crossings, or do restoration work, or if protected by at least 1 foot of packed snow or 2 inches of frozen soil, unless determined otherwise by the Timber Sale Administrator. The Timber Sale Administrator shall approve of all stream crossing locations prior to use.
	Skid trail spacing will be approximately 100 feet apart, allowing for topographic variation and skid trail convergence.
	Skid trails will be waterbarred at least every 100 feet on slopes greater than 20% or as needed depending on slope and ground conditions and slash placed on main trails as needed to control erosion.
	Skid trail location will avoid concentrations of conifer regeneration and aspen trees to the maximum extent possible.
	Landings will be placed in areas without advanced tree regeneration to the maximum extent possible.

Sale Name: Rambo Salvage

C6.6# - EROSION PREVENTION AND CONTROL (11/1998)

A. Purchaser shall locate Temporary Roads on locations approved by the Forest Service. Such location shall include the marking of road centerline or grade-line and the setting of such construction stakes as are necessary to provide a suitable basis for economical construction and the protection of National Forest lands.

B. Skidding with tractors within 100 feet of live streams shall not be permitted except in places designated in advance by Forest Service, and in no event shall skid roads be located in live or intermittent streamcourses. Skid trails shall be located high enough out of draws, swales, and valley bottoms to permit diversion of runoff water to natural undisturbed forest ground cover.

C. Prior to periods of accelerated water runoff, especially during the spring runoff and periods of heavy rainfall, Purchaser shall inspect and open culverts and drainage structures, construct special cross ditches for road runoff, and take other reasonable measures needed to prevent soil erosion and siltation of streams.

D. Temporary Road surface width shall be limited to truck bunk width plus four (4) feet, except for needed turnouts which shall not exceed two (2) times the bunk width plus four (4) feet. If shovels or cranes with revolving carriage are used to skid or load, Temporary Road surface width equal to track width plus tail swing shall be permitted.

E. Unless otherwise agreed in writing, Purchaser shall keep erosion control work current with his operations under the sale and in any case not later than 15 days after completion of skidding on each payment unit or cutting unit.

Sale Name: Rambo Salvage

C6.601# - EROSION CONTROL SEEDING (11/1998)

Following completion of skidding and yarding operations in an area, Purchaser shall seed and fertilize all exposed areas of raw soil which has been designated by the Forest Service on skid trails, landings, firebreaks, slides, slumps, Temporary Roads and traveled ways of Specified Roads n/a following closure specified in C5.41#.

Soil on areas to be seeded shall be left in a roughened condition favorable to the retention and germination of the seed. Scarification of traveled ways on Specified Roads listed above shall be to a minimum depth of 4 inches and a maximum depth of 18 inches.

Seed and fertilizer shall be spread evenly at the rate of 27.5 pounds of seed and n/a pounds of fertilizer per acre.

When fertilizer and seed are applied in separate operations, the second operation shall be carried out within 72 hours of the first.

Seeding shall be done during the period September 1 to November 30 and under the above specified conditions unless otherwise approved.

The kinds and amounts of seed to be sown in terms of pure live seed (PLS) shall be:

See Seed Application Table

All seed purchased will be certified to be free of the noxious weed seeds from weeds listed on the current "All States Noxious Weeds List." Test results from a certified seed analyst and seed analysis labels attached to the bags will be provided to the Forest Service.

The following kinds and amounts of standard commercial fertilizer shall be used with guaranteed analysis of contents clearly marked on containers:

See Fertilizer Application Table

C6.601# -- EROSION CONTROL SEEDING (11/1998)Seed Application Table

<u>Species of Seed</u>	<u>PLS Pounds Per Acre</u>
San Luis Slender Wheatgrass (<i>Elymus trachycaulus</i>)	20
Cultivated barley (<i>Hordeum vulgare</i>)	3.75
White River western wheatgrass (<i>Pascopyrum smithii</i>)	3.75

Fertilizer Application Table

<u>Type of Fertilizer</u>	<u>Pounds Per Acre</u>
N/A	N/A

C6.602# - PROTECTION OF DISTURBED AREAS FROM ESTABLISHMENT OF NOXIOUS WEEDS (11/1998)

In addition to the requirements of C6.601#; Purchaser shall seed and fertilize areas where mineral soil is exposed as designated by the Forest Service.

Unless otherwise agreed to in writing, seeding shall be done in the early spring or fall during weather and moisture conditions favorable for quick germination and growth of the plants. Seeding shall be completed in a timely manner following the last disturbance activity by the purchaser in the disturbed area.

The Certified seed analysis reports from each container shall be provided by Purchaser to the Forest Service prior to application of the seed. Seed and fertilizer shall be spread evenly at the rate of 27.5 pounds of seed and n/a pounds of fertilizer per acre.

When fertilizer and seed are applied in separate operations, the second operation shall be carried out within 72 hours of the first operation.

When an adequate seedbed does not exist, Purchaser shall scarify to get a 2 inch loose soil seedbed, prior to seeding.

The kinds and amounts of seed to be sown in terms of pure live seed (PLS) shall be:

See Seed Application Table

All seed purchased will be certified to be free of the noxious weed seeds from weeds listed on the current "All States Noxious Weeds List." Test results from a certified seed analyst and seed analysis labels attached to the bags will be provided to the Forest Service.

The following kinds and amounts of standard commercial fertilizer shall be used with guaranteed analysis of contents clearly marked on containers:

See Fertilizer Application Table

C6.602# -- PROTECTION OF DISTURBED AREAS FROM ESTABLISHMENT OF NOXIOUS WEEDS (11/1998)

Seed Application Table

<u>Species of Seed</u>	<u>PLS Pounds Per Acre</u>
San Luis Slender Wheatgrass (<i>Elymus trachycaulus</i>)	20
Cultivated barley (<i>Hordeum vulgare</i>)	3.75
White River western wheatgrass (<i>Pascopyrum smithii</i>)	3.75

Fertilizer Application Table

<u>Type of Fertilizer</u>	<u>Pounds Per Acre</u>
N/A	N/A

Sale Name: Rambo Salvage

C6.7# - SLASH TREATMENT (04/2003)

Slash is defined as logs, tops, limbs, and other woody material, exclusive of stumps, which is created by the logging operation and remaining on the ground after logging. In areas where Purchaser-created slash is intermingled and inseparable from pre-existing slash, slash disposal requirements shall apply to the pre-existing slash as well as the Purchaser-created slash. Such areas are designated in the Purchaser Slash Responsibility Table herein.

Slash created in the construction of Specified Roads shall not be considered as logging slash in this Section.

Unless otherwise agreed in writing, Purchaser shall perform the following work described below and/or as shown on the Sale Area Map and/or Slash Disposal Map.

Forest Service and Purchaser shall jointly develop a schedule for completion of slash treatment on the various portions of the sale area.

See Purchaser's Slash Responsibility Table

C6.7# -- SLASH TREATMENT (04/2003)

Purchaser's Slash Responsibility Table

Cutting Unit(s)	Type of Slash Disposal
ALL	Landing Cleanup
	Felling of Damaged Residual Trees
	Scatter

Landing Cleanup

A landing is considered a place where any logs or products are gathered for loading. Logs not meeting utilization standards accumulated at landings shall be decked as agreed to in writing by the Forest Service. All slash accumulated at landings shall be decked.

Piles shall be reasonably compact and free of soil to facilitate burning. Piles will not be less than 6 (six) feet in height. Piles shall be of a size and location which will not result in damage to residual timber. Piles shall be located at least 20 (twenty) feet from the drip line of residual timber and at least 200 (two hundred) feet from perennial streams.

Fell Damaged Residual

Purchaser shall fell trees of all species over 2 (two) inches in diameter and not meeting minimum diameter specifications for Included Timber that are damaged beyond recovery by the Purchaser's operations. Damaged beyond recovery is defined as (1) has the top broken out, (2) leans more than 10 degrees, (3) has less than one half of its original limbs or (4) has its bark removed from at least half the circumference of the bole. Such trees shall be severed at the stump and then treated with other logging slash. Stump height shall not exceed 12 (twelve) inches from the ground surface as measured on the uphill side.

Scatter

Logging slash shall be scattered away from and without unnecessary damage to residual trees. All scattered logs shall be limbed and placed away from residual trees. Logging slash shall be scattered to reduce slash concentrations with slash being generally left within 24 (twenty-four) inches of the ground and not in large piles or windrows.

C6.71 - CHANGES IN SLASH TREATMENTS (11/1998)

Slash treatment measures required in C6.7 may be changed upon written agreement. The Forest Service shall determine the current cost of performing the work to be deleted and the work to be added. When the cost of work deleted exceeds the cost of work added, the agreement shall provide for a lump sum payment to the Forest Service for the amount of the difference.

C6.72# - TEMPORARY ROAD CONSTRUCTION SLASH DISPOSAL (01/2000)

Slash treatment methods of Temporary Road slash shall be agreed to in writing prior to construction. Temporary Road slash shall be treated in accordance with the following:

- A. All timber within the road clearing limits which contains a product meeting the minimum piece specifications stated in A2 shall be felled (not pushed over) and bucked in advance of road construction. All timber shall be felled within the clearing limits whenever it is feasible to do so.
- B. Timber within the clearing limits not meeting minimum piece specifications in A2 and other debris from the clearing and grubbing operations more than 4 inches in diameter and 6 feet in length shall either be (a) utilized and removed from Sale Area, (b) burned within the right-of-way, (c) removed to designated locations shown on Sale Area Map for burying or later burning, (d) buried, (e) processed through a chipping machine, (f) scattered in such a manner as to avoid concentrations of slash and without damaging other trees or resource values, (g) windrowed (h) decked, or (i) a combination thereof.
- C. All material to be treated or disposed of shall be bucked into lengths not to exceed 10 feet before being piled or buried.
- D. If debris is to be burned, burning shall be complete and shall be done at such times and in a manner approved in writing by Forest Service. Residual construction slash from burning shall be buried, scattered or removed to agreed locations.
- E. Debris to be buried shall be placed in prepared holes, benches, or trenches at agreed locations and covered with not less than 8 feet of native soil or rock. Slash and debris may be buried in the roadway providing hauling can be supported and providing there is little probability or hazard of slope failure.
- F. If debris is to be chipped, the chips shall be spread over the surface of the ground in such a manner that their loose depth does not exceed 6 inches. Chips may be mixed with soil within roadway.
- G. Slash and debris may be scattered in those situations where the volume of slash or residual slash is relatively light and the adjacent stands of timber are sufficiently open to accommodate the scattering without damage.
- H. When slash is to be windrowed, the windrow area shall be cleared. Windrows shall be placed parallel to and along the embankment toe. Windrows shall not be placed against trees.
- I. If material is decked, logs not meeting Utilization Standards that are 6 inches or more in diameter shall be bucked into lengths not to exceed 10 feet and piled at agreed locations.

C6.83# - PRODUCT ACCOUNTABILITY (10/2003)

The following requirements are applicable to Product Removal Permits:

1. Forest Service will issue to Purchaser or designated representative(s) serially numbered Product Removal Permit books for use only on this sale. Product Removal Permit books, whether used or unused, shall be accountable property of Forest Service and shall be returned to issuing Ranger District in accordance with the instructions contained on the cover of each book. Each Product Removal Permit which is not returned will be considered a lost load and charged for as described in B6.85 or B6.851, as appropriate.

2. Purchaser shall require all permits be filled out in ink, and otherwise completed, by an individual named in writing, showing the date loaded, sale brand, sale name, and destination where products will be unloaded. On the Load Permit, the month, day, and time the truck is loaded shall be punched out. Each permit will then be attached to the load in accordance with instructions on the inside cover of the Product Removal Permit book. Products will not be hauled from the Sale Area without the Load Permit attached to the load.

3. Before products are hauled, the truck driver must sign the Woods Permit in ink using legal signature.

4. Each load will have the last three digits of the load receipt number painted on both ends of three logs with black paint. All loads that consist of a truck and pup(s) must have the last three digits of the load receipt painted on both ends of three logs on all subunits of the combination.

C7.2 - FIRE PRECAUTIONS (09/1993)

1. Smoking and Lunch Fires. Smoking is prohibited except inside a building, developed recreation site, vehicles, or while seated in an area of at least three feet in diameter that is barren or cleared of all flammable materials. 36 CFR 261.52(d).

The building of camp, lunch, warming and other fires within the sale area and vicinity is prohibited, except at established camps or at other safe places where all flammable material has been cleared away sufficiently to prevent the start and spread of wildfires. Forest Service may, upon written request of purchaser, designate specific places where campfires may be built for purposes of heating lunches.

2. Spark Arrester and Mufflers. Notwithstanding B7.2, operating or using any internal combustion engine, on any timber, brush, or grass covered land, including trails and roads traversing such land, without a spark arrester, maintained in effective working order, meeting either (I) Department of Agriculture, Forest Service standard 5100, "SPARK ARRESTERS FOR INTERNAL COMBUSTION ENGINES," (current edition); or (II) the Society of Automotive Engineers (SAE) Recommended Practices J335, "MULTIPOSITION SMALL ENGINE EXHAUST SYSTEM FIRE IGNITION SUPPRESSION," (current version) and J350, 36 CFR 261.52(j) is prohibited.

Passenger carrying vehicles, pickups, medium and large highway trucks (80,000 GVW) will be equipped with a factory designed muffler system which is specified for the make and model of the respective vehicle/truck or with a muffler system that is equivalent or that exceeds factory specifications.

Exhaust systems shall be properly installed and continually maintained in serviceable condition.

3. Fire Extinguishers and Tools on Equipment. While in use, each internal combustion engine including tractors, trucks, yarders, loaders, welders, generators, stationary engines, or comparable powered equipment shall be provided with at least the following:

(a) One fire extinguisher, at least 5#ABC with an Underwriters Laboratory (UL) rating of 3A - 40BC, or greater.

(b) One shovel, sharp, size O or larger, round-pointed with an overall length of at least 48 inches.

(c) One axe, sharp, double bit 3-1/2#, or one sharp pulaski.

Extinguishers, shovels, axes, and pulaskis shall be mounted so as to be readily available from the ground. All tools shall be maintained in a serviceable condition.

4. Power Saws. Each gasoline engine power saw shall be provided with one chemical-pressurized fire extinguisher of not less than 8-ounce capacity by weight, and one size O or larger, round-pointed shovel with an overall length of at least 48 inches. The extinguisher and shovel shall be maintained in good working order. The extinguisher shall be with the power saw operator and immediately available for use at all times. The extinguisher shall not be affixed to the saw. The shovel shall be readily available to the operator of the saw at all times. Having the shovel with the gas can used to refuel the saw may be considered "readily available" if not more than 200 feet from the saw. During periods of critical fire danger, Forest Service may prescribe other precautionary measures.

Any fueling or refueling of a power saw shall be done in area which has first been cleared of material which will carry fire. The power saw shall be moved at least 10 feet from the place of fueling or refueling before starting.

5. Blasting and Welding. The use of fuses in blasting shall not be permitted except near power lines where the danger of accidental detonation is present, and then only by special written permission of Forest Service. Whenever the relative humidity falls below 50 percent, Purchaser shall place a watchman at each point where blasting is done who shall remain on duty for at least one hour after blasting is finished, and

who shall be equipped with shovel and a water-filled backpack can equipped with a hand pump. During periods when the relative humidity falls below 20 percent, blasting shall be discontinued unless authorized, with special provisions, in writing by Forest Service. Blasting shall not be permitted in any area not cleared to mineral soil without advance written approval of Forest Service and with such special precautions as may be required.

Prima Cord shall not be used in clearing operations, and in other areas where timber has been felled and slash not burned.

Unless otherwise directed in writing by Forest Service, all flammable material shall be cleared for 10 feet around any piece of equipment being welded. In addition, Purchaser shall provide a fire extinguisher of a size and type designed to extinguish a fire in the flammable materials surrounding the spot being welded.

In order to determine the relative humidity, Purchase shall either (a) provide and maintain weather instruments, that will measure relative humidity, in the area where blasting will occur; or (b) provide communications to obtain weather data from Forest Service.

Explosives shall be stored at all times in a locked box marked "Explosives". Powder and blasting caps shall be stored in separate boxes.

6. Storage of Flammables. Gasoline, oil, grease and other highly flammable material shall be stored either in a separate building, or at a site where all debris is cleared within a radius of 25 feet. Storage buildings or sites shall be a minimum distance of 50 feet from other structures. Storage buildings shall be adequately posted to warn of the flammables and to prohibit smoking in or around the building.

7. Camp Fire Protection. The grounds around all trailers, buildings, other facilities constructed or placed on or near Sale Area under B6.2 shall be kept free of flammable material for a distance of at least 20 feet from the wall of such structure. Burning of such flammable material shall be as prescribed by Forest Service in writing.

Stovepipes of all wood burning stoves shall be equipped with suitable roof jacks and serviceable spark arresters. Stovepipes shall be no closer than 2 feet from any wood or other flammables unless adequately protected from by metal or asbestos shields.

C8.212 - MARKET-RELATED CONTRACT TERM ADDITION (11/2008)

The term of this contract may be adjusted when a drastic reduction in wood product prices has occurred in accordance with 36 CFR 223.52. The Producer Price Index used to determine when a drastic reduction in price has occurred is stated in A20. Purchaser will be notified whenever the Chief determines that a drastic reduction in wood product prices has occurred. If the drastic reduction criteria specified in 36 CFR 223.52 are met for 2 consecutive calendar quarters, after contract award date, Contracting Officer will add 1 year to the contract term, upon Purchaser's written request. For each additional consecutive quarter such a drastic reduction occurs, Contracting Officer will, upon written request, add an additional 3 months to the term during Normal Operating Season, except that no single 3-month addition shall extend the term of the contract by more than one year. Contracting Officer must receive Purchaser's written request for a market-related contract term addition before the expiration of this contract.

No more than 3 years shall be added to a contract's term by market-related contract term addition unless the following conditions are met:

(i) The sale was awarded after December 31, 2006; and

(ii) A drastic reduction in wood product prices occurred in at least ten of twelve consecutive quarters during the contract term, but not including the quarter in which the contract was awarded.

For each qualifying quarter meeting the criteria in paragraphs (i) and (ii) of this provision, the Forest Service will, upon the Purchaser's written request, add an additional 3 months during the normal operating season to the contract, except no single 3-month addition shall extend the term of a contract by more than 1 year.

In no event shall a revised contract term exceed 10 years as a result of market-related contract term addition.

Additional contract time may not be granted for those portions of the contract that have a required completion date or for those portions of the contract where Contracting Officer determines that the timber is in need of urgent removal or that timber deterioration or resource damage may result from delay.

C8.66# (Option 1) - USE OF TIMBER (04/2004)

(a) This contract is subject to the Forest Resources Conservation and Shortage Relief Act of 1990, as amended (16 USC 620, et seq.).

(b) Except for none determined pursuant to public hearing to be surplus, unprocessed Included Timber shall not be exported from the United States nor used in direct or indirect substitution for unprocessed timber exported from private lands by Purchaser or any person as defined in the Act (16 USC 620e).

(c) Timber in the following form will be considered unprocessed:

(i) Trees or portions of trees or other roundwood not processed to standards and specifications suitable for end product use;

(ii) Lumber, construction timbers, or cants intended for remanufacturing not meeting standards defined in the Act (16 USC 620e); and

(iii) Aspen or other pulpwood bolts exceeding 100 inches in length.

(d) Unless otherwise agreed in writing, unprocessed Included Timber shall be delivered to a domestic processing facility and shall not be mixed with logs intended for export.

(e) Prior to award, during the life of this contract, and for a period of 3 years from Termination Date, Purchaser shall furnish to Forest Service, upon request, records showing the volume and geographic origin of unprocessed timber from private lands exported or sold for export by Purchaser or affiliates.

(f) Prior to delivering unprocessed Included Timber to another party, Purchaser shall require each buyer, exchangee, or recipient to execute an acceptable agreement that will:

(i) Identify the Federal origin of the timber;

(ii) Specify domestic processing for the timber involved;

(iii) Require the execution of such agreements between the parties to any subsequent transactions involving the timber;

(iv) Require that all hammer brands and/or yellow paint must remain on logs until they are either legally exported or domestically processed, whichever is applicable; and

(v) Otherwise comply with the requirements of the Act (16 USC 620d).

(g) No later than 10 days following the execution of any such agreement between Purchaser and another party, Purchaser shall furnish to Forest Service a copy of each such agreement. Purchaser shall retain, for 3 years from Termination Date, the records of all sales, exchanges, or dispositions of all Included Timber.

(h) Upon request, all records dealing with origin and disposition of Included Timber shall be made available to Contracting Officer.

(i) For breach of this Section, Forest Service may terminate this contract and take such other action as may be provided by statute or regulation, including the imposition of penalties. When terminated by Forest Service under this Section, Forest Service will not be liable for any Claim submitted by Purchaser relating to the termination.